

PBL-12-03 TCA

Code: PBL0400000



PBL 12

Description:

Rectangular polycarbonate box, prepared to supply 12 V DC voltage. Designed to be installed on a symmetrical DIN 46277/3, EN 50022 rail of an electrical panel, taking up a width of 12 single magneto-thermal switches (215 mm). Equipment specially adapted to power beacons uninterruptedly (with mains power on or off). Power supply unit with batteries with permanent output of 12 V, 0.36 A. Ni-Cd battery included. Provides 1 hour of autonomy at maximum output consumption. Provided with output short circuit protection with automatic reset. Includes a microprocessor for functioning with a Daisatest Centralised System.

Characteristics:


Format: PBL 12

Duration (h): 1

Output voltage without mains (V): 12 DC

Output power without mains (W): 1h/4,32W

Output voltage with mains (V): 12 DC

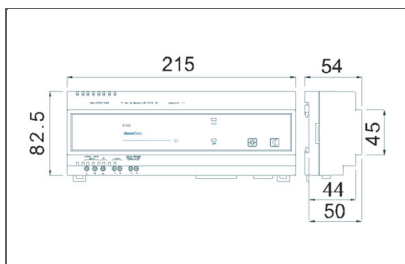

PBL 12

Finishes:

Voltage: 220-230V 50/60Hz

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.