

## PBL-12-06

Code: PBL0700000




PBL 12

### Description:

Rectangular polycarbonate box, prepared to supply 12 V DC voltage. Designed to be installed on a symmetrical DIN 46277/3, EN 50022 rail of an electrical panel, taking up a width of 12 single magneto-thermal switches (215 mm). Equipment specially adapted to power beacons uninterruptedly (with mains power on or off). Power supply unit with batteries with permanent output of 12 V, 0.66 A. Ni-MH battery included. Provides 1 hour of autonomy at maximum output consumption. Provided with output short circuit protection with automatic reset.

### Characteristics:

Format: PBL 12  
 Duration (h): 1  
 Output voltage without mains (V): 12 DC  
 Output power without mains (W): 1h/7,92W  
 Output voltage with mains (V): 12 DC  
 Output power with mains (W): 1h/7,92W

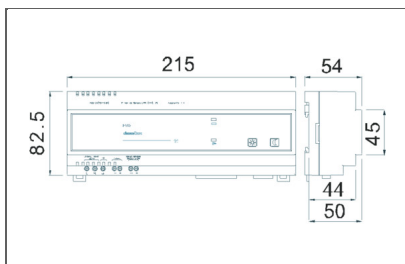

PBL 12

### Finishes:

Voltage: 220-230V 50/60Hz

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning.  
 The selected finishes may not coincide with the displayed images.