


PBL-24-02 TCA

Code: PBL1100000



PBL 24-02

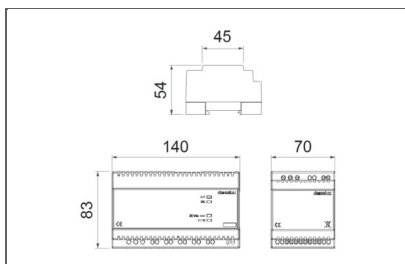

PBL 24-02

Description:

Rectangular polycarbonate box, prepared to supply 24 V DC voltage. Designed to be installed on a symmetrical DIN 46277/3, EN 50022 rail of an electrical panel, taking up a width of 12 single magneto-thermal switches (140+70 mm). Equipment specially adapted to power beacons uninterruptedly (with mains power on or off). Power supply unit with batteries with permanent output of 24 V, 0.2 A. Ni-MH battery included. Provides 1 hour of autonomy at maximum output consumption. Provided with over-current and output short circuit protection with automatic reset. Includes a microprocessor for functioning with a Daisatest Centralised System. Allows control of DIR-1 accessory through the DaisaTest Centralised System.

Characteristics:

Format: PBL 24-02

Duration (h): 1

Output voltage without mains (V): 24 DC

Output power without mains (W): 4,8

Output voltage with mains (V): 24 DC

Output power with mains (W): 4,8

Finishes:

Voltage: 220-230V 50/60Hz

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.