

PBL-25

Code: PBL0200000




PBL 25

Description:

Rectangular polycarbonate box, prepared to supply 24 V AC/DC voltage. Designed to be installed on a symmetrical DIN 46277/3, EN 50022 rail of an electrical panel, taking up a width of 16 single magneto-thermal switches (215+64 mm). Equipment specially adapted to power beacons uninterruptedly (with mains power on or off). Power supply unit with batteries with permanent output of 24 V, 0.38 A. Ni-Cd battery included. Provides one hour of autonomy.

Characteristics:

Format: PBL 25
Duration (h): 1
Output voltage without mains (V): 24 DC
Output power without mains (W): 10
Output voltage with mains (V): 24 AC
Output power with mains (W): 10

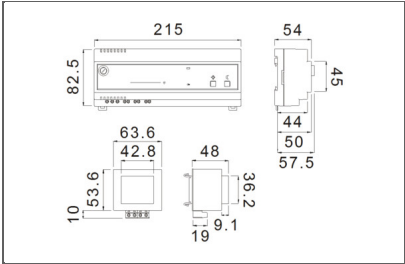

PBL 25

Finishes:

Voltage: 220-230V 50/60Hz

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.