


BUS-TAM 450/750 100m

Code: BUS0300000



BUS-TAM 450-750 V

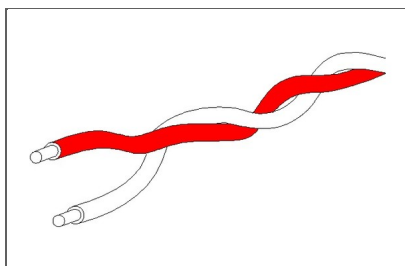

BUS-TAM 450/750 V

Description:

Cable consisting of two unipolar conductors with insulation 450/750V white-red twisted together, 1.5 mm² cross section. For the communication line between the TEV Control Unit and TCA devices or for the communication of EV devices in CB series central battery systems. Solution for installation on corrugated tube. Length 100 metres.

Characteristics:

Number of channels: 2
 Section (mm²): 1.5
 Type: H07Z1-K
 Uo/U (V): 450/750
 Insulation colour: Red, White
 Insulation material: Polyolefin
 Cable diameter (mm): 2x2.9
 Max. capacity (pf/m 1KHz): 100
 Max. Resistance conductor (Ohm/Km 20°C): 16
 CPR Classification: Cca-s1b, d1, a1
 Conductor: Class 5, flexible cooper
 Pass: Twisted

****Daisalux reserves the right to change, update or remove the information contained in this document without prior warning.
 The selected finishes may not coincide with the displayed images.**